

DUETTE

DIAGRAM 1


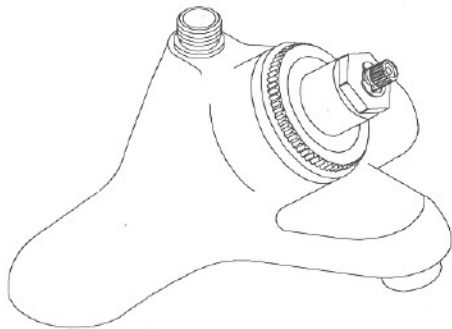


DIAGRAM 2

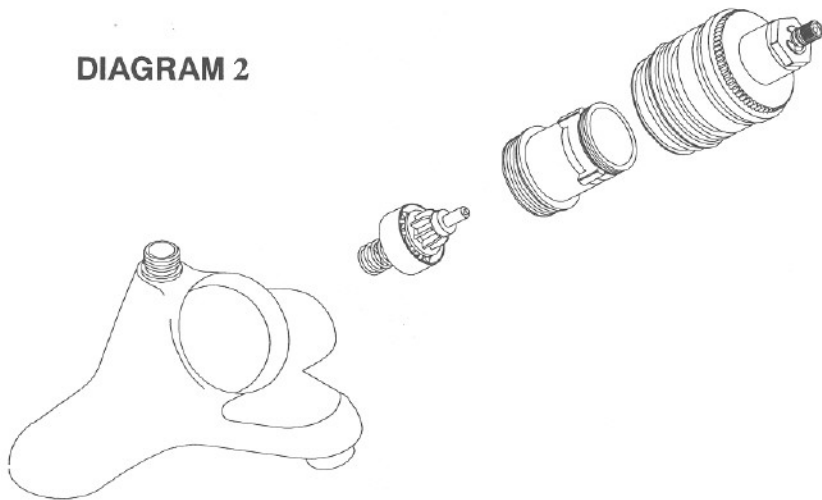

- REMOVAL OF CARTRIDGE FROM VALVE
- REMOVE THE CONTROL KNOB AND BODY SLEEVE
- USING A 25MM SOCKET OR SPANNER INSCREW THE HEAD (STANDARD RIGHT HAND THREAD)
- PULL OUT DIVERTOR ASSEMBLY
- USING A 38MM SOCKET UNSCREW THE HALF CARTRIDGE AND REMOVE (STANDARD RIGHT HAND THREAD) PLEASE NOTE THIS HAS A 30NM TORQUE SETTING
- REMOVE THERMOSTAT, PISTON AND RETURN SPRING.